

MCHQ320V-GA series

320W LED Switching Power Supply (CV+CC) with output voltage and current level adjustment



■ Features:

- Constant voltage / Constant current mode
- Universal AC input range (max. 305VAC)
 - Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
 - Cooling by free air convection
- High surge protection: 4kV – differential mode, 6kV – common mode
 - IP65 protection class
- Suitable for dry, humid and rainy environment

CONSTANT CURRENT
CONSTANT VOLTAGE

SELV IP65



ELECTRICAL SPECIFICATION

MODEL	MCHQ320V12-GA	MCHQ320V24-GA
OUTPUT		
RATED VOLTAGE	12V	24V
RATED CURRENT	22A	13.3A
VOLTAGE ADJUSTMENT RANGE – VADJ POTENTIOMETER	10.5 ÷ 13.5V	22 ÷ 26V
CURRENT ADJUSTMENT RANGE – IADJ POTENTIOMETER	13.5 ÷ 22A	7.5 ÷ 13.3A
MINIMUM VOLTAGE FOR CONSTANT CURRENT MODE	7.2V	14.4V
RATED POWER	264W	320W
LINE REGULATION		± 1%
LOAD REGULATION		± 1%
CURRENT ACCURACY		± 5%
VOLTAGE RIPPLE (PK-PK)		± 2%
CURRENT RIPPLE (PK-PK)		± 5%
SETUP, RISE TIME	300ms, 100ms / 230Vac	

INPUT

VOLTAGE RANGE	90 ÷ 305Vac (refer to Derating Curve)	
FREQUENCY RANGE	47 ÷ 63Hz	
AC CURRENT (MAX.)	4.5A / 110VAC; 1.6A / 230VAC	
INRUSH CURRENT (MAX.)	90A / 230VAC(25°C)	
POWER FACTOR (TYP.)	PF > 0.98 / 230VAC at full load (refer to PF curve)	
THD (MAX.)	THD < 4% / 230VAC at full load (refer to THD curve)	
EFFICIENCY (TYP.)	92%	93.5%
LEAKAGE CURRENT (MAX.)	0.7mA / 230VAC at full load	
NO LOAD POWER CONSUMPTION (MAX.)	0.5W / 230VAC	

MCHQ320V-GA series

320W LED Switching Power Supply (CV+CC) with output voltage and current level adjustment



PROTECTIONS

OVER LOAD	Range: 110 ÷ 160% rated load Type: constant current limiting to 60% rated voltage next hiccup mode. Recovers automatically after fault condition is removed.
SHORT CIRCUIT	Type: hiccup mode. Recovers automatically after fault condition is removed.
OVER VOLTAGE	Range: 150% rated voltage Type: shut down output voltage. Re-power on to recovery.
OVER TEMPERATURE	110°C Type: shut down output voltage. Re-power on to recovery.

WORKING ENVIRONMENT

WORKING TEMPERATURE	-40°C ÷ 70°C; tc=90°C (refer to derating curve)
WORKING HUMIDITY	10 ÷ 90% RH non-condensing
STORAGE TEMPERATURE AND HUMIDITY	-40°C ÷ 85°C, 5 ÷ 95% RH non-condensing

SAFETY and EMC STANDARDS

SAFETY STANDARDS	Compliance to EN61347-1, EN61347-2-13, EN 62493
EMC EMISSION	Compliance to EN55015
EMC IMMUNITY	Compliance to EN61547
HARMONIC CURRENT	Compliance to EN61000-3-2, EN61000-3-3
WITHSTAND VOLTAGE	IN/OUT: 3200VAC / 5mA, 60s IN/GND: 1600VAC / 5mA, 60s OUT/GND: 1000VAC / 5mA, 60s
INSULATION RESISTANCE	IN/OUT: ≥ 10MΩ / 500VDC
GROUNDING RESISTANCE	≤ 0.1Ω / 25A, 1min
IP PROTECTION CLASS	IP65

OTHERS

MTBF	200 000 hours / 25°C, full load, according to MIL-HDBK-217F
LIFETIME	55 000 hours / 230VAC, full load, tc=75°C
DIMENSIONS	261 x 62.5 x 41.4mm (L x W x H)
WEIGHT	1.5kg; 10pcs./box; box weight and dimension: 17kg; 32 x 18.5 x 28cm
PRIMARY CABLE	H05RN-F 105°C 3Gx1.0mm ² , length = 300 ± 30mm
SECONDARY CABLE	12V: SJTW, 2x2*14AWG / 2x2*2.08mm ² , 105°C, length = 300 ± 30mm 24V: SJTW, 2*14AWG / 2*2.08mm ² , 105°C, length = 300 ± 30mm

EAN Code



1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.

2. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

MCHQ320V-GA series

320W LED Switching Power Supply (CV+CC) with output voltage and current level adjustment




MECHANICAL SPECIFICATION: MCHQ320V12-GA

INPUT

H05RN-F 105°C 3Gx1.0mm²
length = 300mm ± 30mm

AC/L(brown)
AC/N(blue)
GND(yellow-green)

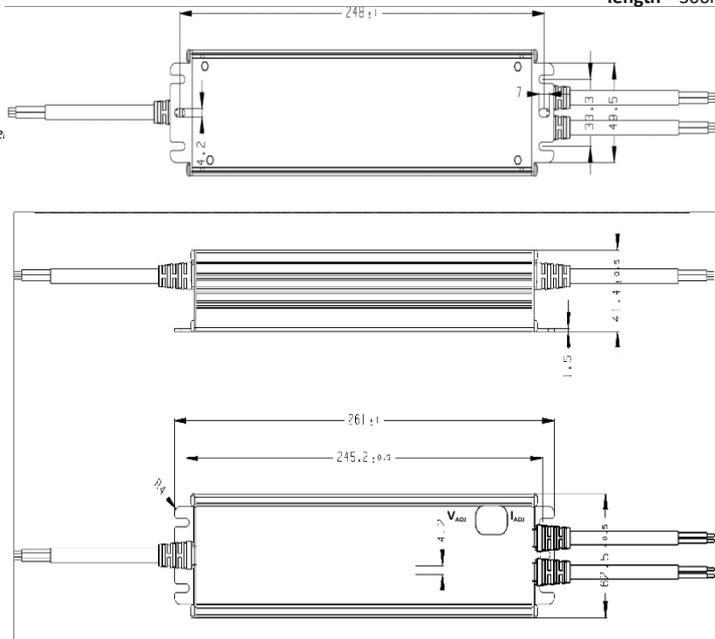

OUTPUT

12V: SJTW, 2x2*14AWG / 2x2*2.08mm², 105°C
length = 300mm ± 30mm


V+ (white)
V- (black)
V+ (white)
V- (black)

MECHANICAL SPECIFICATION: MCHQ320V24-GA

INPUT

H05RN-F 105°C 3Gx1.0mm²
length = 300mm ± 30mm

AC/L(brown)
AC/N(blue)
GND(yellow-green)

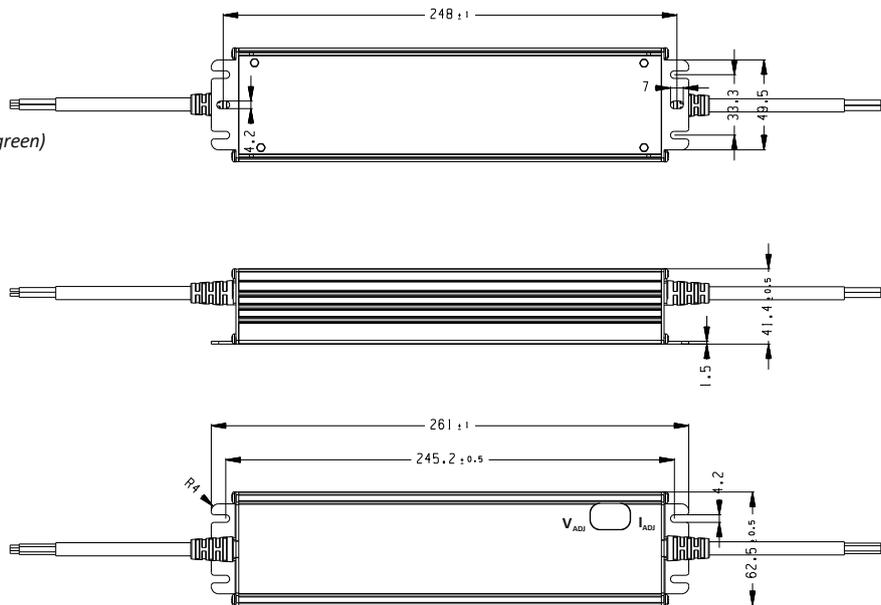

OUTPUT

24V: SJTW, 2*14AWG / 2*2.08mm², 105°C
length = 300mm ± 30mm

V+ (white)
V- (black)


MCHQ320V-GA series

320W LED Switching Power Supply (CV+CC) with output voltage and current level adjustment




CHARACTERISTICS


DERATING CURVE

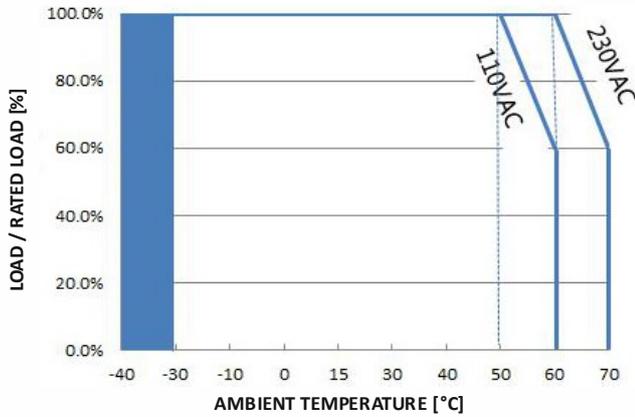


STATIC CHARACTERISTICS

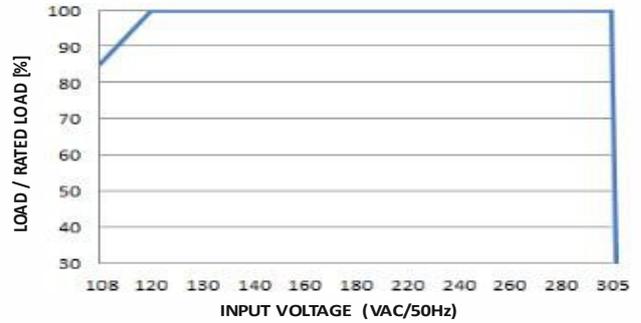


I-V CURVE

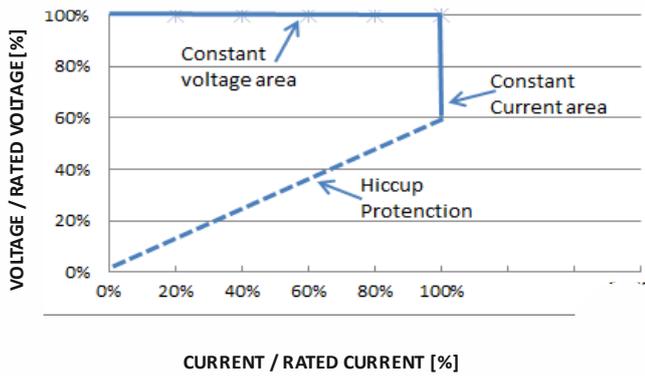

PF CURVE

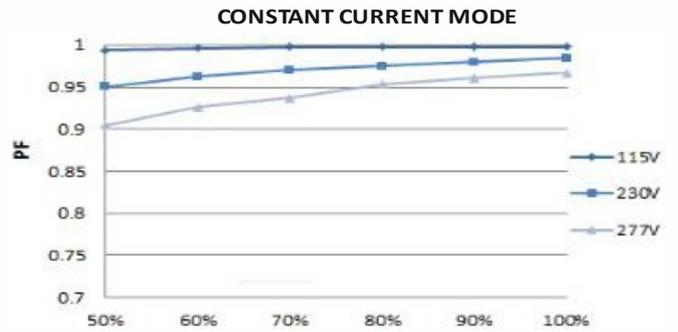

THD Curve

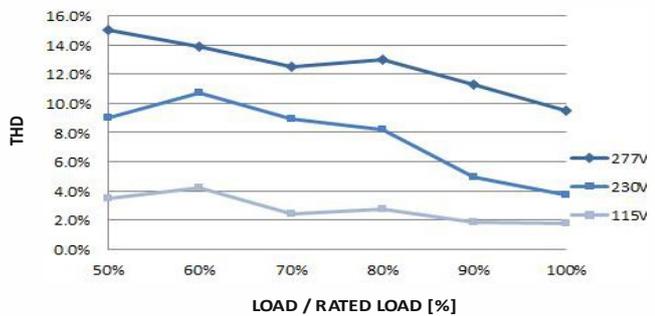

EFFICIENCY CURVE

